



## 环形变压器 Toroidal transformer

**特点:** 环形变压器属于低频电感变压器, 具有效率高, 性价比高, 抗干扰能力强, 待机功耗低, 无高频电磁干扰

**应用场合:** 主要应用于医疗设备, 自控设备, 高档音响设备, 安全监控设备, 户外工程照明, 无线电设备, 广播通讯设备等



### 环形变压器数据参数


额定功率 Rated Power (VA)	电压调整率Voltage Regulation(%)	效率 Efficiency(%)	外形尺寸 Dimension(mm)		重量 Weight (KG)
			高度 Height	外径 Diameter	
25	20	73.0	25	68	0.4
30	16.5	76.6	25	72	0.5
40	15.8	80.2	33	79	0.6
50	15.2	82.4	33	84	0.7
60	13.8	83.5	34	89	0.8
80	12.6	84.7	34	95	1.0
100	11.2	86.5	35	105	1.3
120	9.6	87.3	40	110	1.6
150	7.2	88.1	42	116	2.0
160	6.6	88.6	42	118	2.1
200	6.1	89.7	48	120	2.4
250	5.5	90.3	50	127	2.9
300	5.2	91.7	55	128	3.2
400	4.6	93.8	70	133	4.7
500	4.3	94.6	72	140	5.5
600	4.1	95.0	72	155	6.7
800	3.8	95.1	72	170	8.2
1000	3.3	95.8	78	180	10.0
1200	2.9	96.2	80	198	13.4
1600	2.8	96.6	86	210	16.0
2000	2.5	96.9	90	232	20.0



## R形变压器 R-Core transformer

**特点:** R形变压器属于低频电感变压器, 具有效率高, 性价比高, 抗干扰能力强, 待机功耗低, 无高频电磁干扰

**应用场合:** 特别适用于医疗设备、显示设备、音响设备、办公设备。

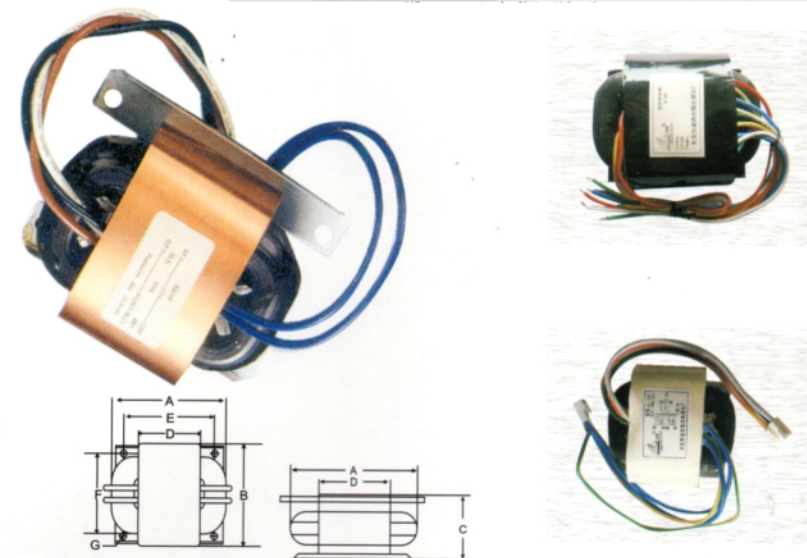

### R形变压器数据参数

规格 (R-NO)	额定功率 Rated Power (VA)	A	B	C	D	E	F	G	重量 Weight (KG)
R-5	3-6	59	50	27	35	45	35	4-Φ4	0.2
R-8	6-10	69	60	35	38	53	44	4-Φ4	0.3
R-10	8-15	75	63	37	42	55	45	4-Φ4	0.4
R-20	15-28	80	70	39	44	70	55	4-Φ4	0.5
R-25	25-35	83	72	42	45	70	55	4-Φ4	0.6
R-30	30-45	95	76	42	56	70	60	4-Φ5	0.7
R-40	35-55	97	81	44	54	70	60	4-Φ5	0.9
R-50	50-65	98	88	48	54	75	65	4-Φ5	1.0
R-65	65-90	105	90	51	58	90	60	4-Φ5	1.2
R-80	70-100	122	91	52	75	90	70	4-Φ5	1.4
R-100	90-130	124	103	55	72	100	80	4-Φ5	1.7
R-160	150-200	136	112	63	82	100	85	4-Φ5	2.6
R-260	200-300	149	119	66	90	130	95	4-Φ5	3.1
R-320	300-380	159	130	70	97	135	95	4-Φ6	3.8
R-600	380-620	177	143	85	103	142	100	4-Φ8	6.5
R-1000	650-1200	214	172	100	127	180	140	4-Φ10	10.5
R-1500	1200-1500	228	190	95	126	180	140	4-Φ10	13.0